
RANGE AVAILABLE FROM 20KVA TO 1300KVA



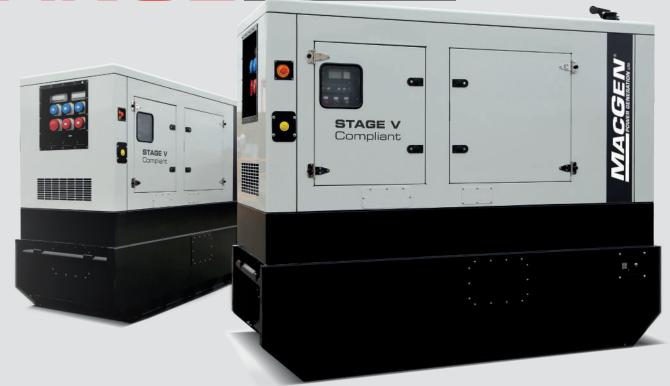

→ GENERATOR SET FEATURES

Engine

- · Diesel engine
- · 4-stroke cycle
- · Water-cooled
- · 12V electrical system
- · Radiator with blower fan
- · Water separator filter (no visible level)
- · Electronic governor
- · ATA sensor
- · BPA sensor
- Radiator water level sensor
- · Dry air filter
- · Hot parts protection
- · Moving parts protection

Alternator

- · Self-excited and self-regulated
- · IP23 protection
- · H class insulation

- M5 control panel with electronic CEM7 control unit and switched emergency stop
- Power panel with built-in circuit breaker plates
- · Safety relay in output terminal board
- · Battery isolator

Electrical System

- Adjustable earth leakage protection standard with thermal magnetic protection
- · 4-pole thermal magnetic circuit breaker
- Battery charger alternator with ground connection
- Starter battery/ies installed
- Ground connection electrical installation with connection ready for ground spike (not supplied)







→ ADDITIONAL OPTIONS

- · Auto start packages
- Synchronised options (Gen to Gen / Gen to Mains)
- · Heavy duty lift & drag skids
- · Dual & multi-voltage socket packs
- 3-way fuel bulk tank kit High capacity fuel tank
- · Fast tow trailer unit
- · Water fuel pre-filters

- · Switchable dual frequency
- · Remote monitoring & control systems
- · Water jacket heater
- · Battery trickle charger
- · Programmable timer
- · Low water level sensor
- · Marine grade alternators
- · PMG on alternators
- Customised canopy colours

