


MGB SERIES

VERTICAL LIFT electric, self-propelled

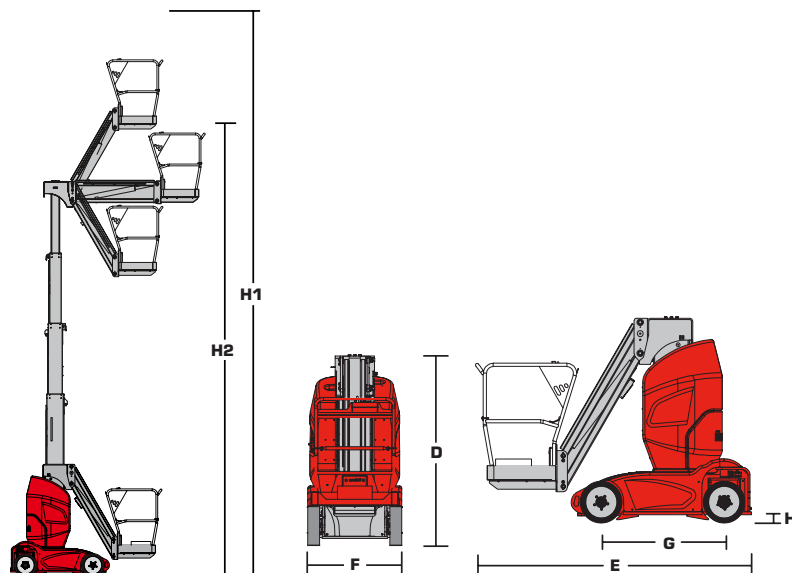

Standard Features

- 200kg lifting capacity
- Standard platform with median sliding rod
- Auxiliary platform lowering system
- Ground emergency lowering valve
- Proportional raising and driving control
- Diagnosis system
- AC wiring to platform
- Lowering and tilting alarm
- 0m internal-radius turn
- Double wheel brake
- Hydraulic brake release
- Fixed pothole guards
- Rear shield mounted with hinge, conveniently to close all major electrical and hydraulic components
- Transportation fixing hole
- Wide forklift hole
- Non-marking solid tyres

Optional Features

- Fibreglass platform
- Goods collection platform
- Motion alarm
- Tool box
- Platform positioning laser lights
- Fluorescent tubes box
- Working flashing beacon
- Top limit protection auto-stop device
- Maintenance-free battery
- Equipment protection cover
- Cannot be driven when charging

SPECIFICATION		
Model	MGB-19J	MGB-26J
Max. Working Height H1	8.00m	10.00m
Max. Platform Height H2	6.00m	8.00m
Lift Capacity	200kg	
Max. Outreach	3.15m	
Platform Size (LxWxH)	0.91 x 0.85 x 1.14m	
Stowed Size (ExFxD)	2.76 x 0.99 x 1.99m	
Wheelbase G	1.20m	
Ground Clearance H	0.075m	
Ground Clearance - deployed pothole	0.025m	
Turning Radius - Inside	0m	
Turning Radius - Outside	1.82m	
Driving Speed - Stowed	4.5km/h	
Driving Speed - Raised	0.7km/h	0.5km/h
Jib Swing	60°	
Gradeability	23%	
Max. Vertical Tilt	2.5°	
Tyre Size	406 x 125mm	
Power Source	DC 24V/250Ah	
Weight	2800kg	2880kg